

FIREWISE

THE EMBER THREAT & HOME IGNITION ZONE.

Utah is exposed to a variety of natural disasters such as floods, wildland fires, severe weather, and earthquakes. The state also deals with hazardous materials. Before disaster strikes, make sure that your family, business, school, and community have emergency plans.

What are the primary threats to homes during a wildfire? Research around home destruction vs. home survival in wildfires point to embers and small flames as the main way that the majority of homes ignite in wildfires. Embers are burning pieces of airborne wood and/or vegetation that can be carried more than a mile through the wind. They can cause spot fires and ignite homes, debris and other objects.

There are methods for homeowners to prepare their homes to withstand ember attacks and minimize the likelihood of flames or surface fire touching the home or any attachments. Experiments, models and post-fire studies have shown homes ignite due to the condition of the home and everything around it, up to 200' from the foundation. This is called the Home Ignition Zone (HIZ).

What is the Home Ignition Zone? The concept of the home ignition zone was developed by retired USDA Forest Service fire scientist Jack Cohen in the late 1990s, following some breakthrough experimental research into how homes ignite due to the effects of radiant heat. The HIZ is divided into three zones.



IMMEDIATE ZONE

The home and the area 0-5' from the furthest attached exterior point of the home; defined as a non-combustible area. Science tells us this is the most important zone to take immediate action on as it is the most vulnerable to embers. **START WITH THE HOUSE ITSELF** then move into the landscaping section of the Immediate Zone.


- Clean roofs and gutters of dead leaves, debris and pine needles that could catch embers.
- Replace or repair any loose or missing shingles or roof tiles to prevent ember penetration.

- Reduce embers that could pass through vents in the eaves by installing 1/8 inch metal mesh screening.
- Clean debris from exterior attic vents and install 1/8 inch metal mesh screening to reduce embers.
- Repair or replace damaged or loose window screens and any broken window screens or boxed-in areas below patios and decks with wire mesh to prevent debris and combustible materials from accumulating.
- Move any flammable material away from wall exteriors—mulch, flammable plants, leaves and needles, firewood piles—anything that can burn. Remove anything stored underneath decks or porches.

REDUCING WILDFIRE RISKS IN THE HOME IGNITION ZONE

When your home ignition zone extends into neighboring properties. You may find your home ignition zone overlaps into adjacent properties. To maximize the benefits of your work, it's extremely important to work collaboratively with neighbors to reduce your shared risk.

On parcels of land larger than the 100 ft extended zone. Property owners with more than 100ft of land that extends beyond the home should also consider additional actions up to 200ft into the Extended Zone to provide additional benefits in protecting the home and outbuildings.

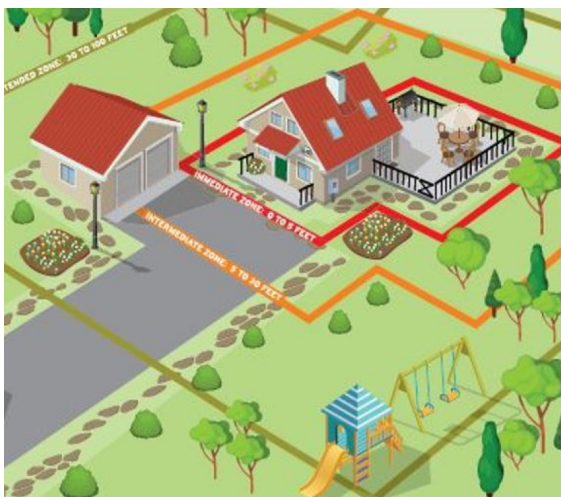


INTERMEDIATE ZONE

5-30' from the furthest exterior point of the home. Landscaping/hardscaping—employing careful landscaping or creating breaks that can help influence and decrease fire behavior.

- Clear vegetation from under large stationary propane tanks.
- Create fuel breaks with driveways, walkways/paths, patios, and decks.
- Keep lawns and native grasses mowed to a height of four inches.
- Remove ladder fuels (vegetation under trees) so a surface fire cannot reach the crowns. Prune trees up to six to ten feet from the ground; for shorter trees do not exceed 1/3 of the overall tree height.
- Space trees to have a minimum of eighteen feet between crowns with the distance increasing with the percentage of slope.

- Tree placement should be planned to ensure the mature canopy is no closer than ten feet to the edge of the structure.
- Tree and shrubs in this zone should be limited to small clusters of a few each to break up the continuity of the vegetation across the landscape.

TREE SPACING

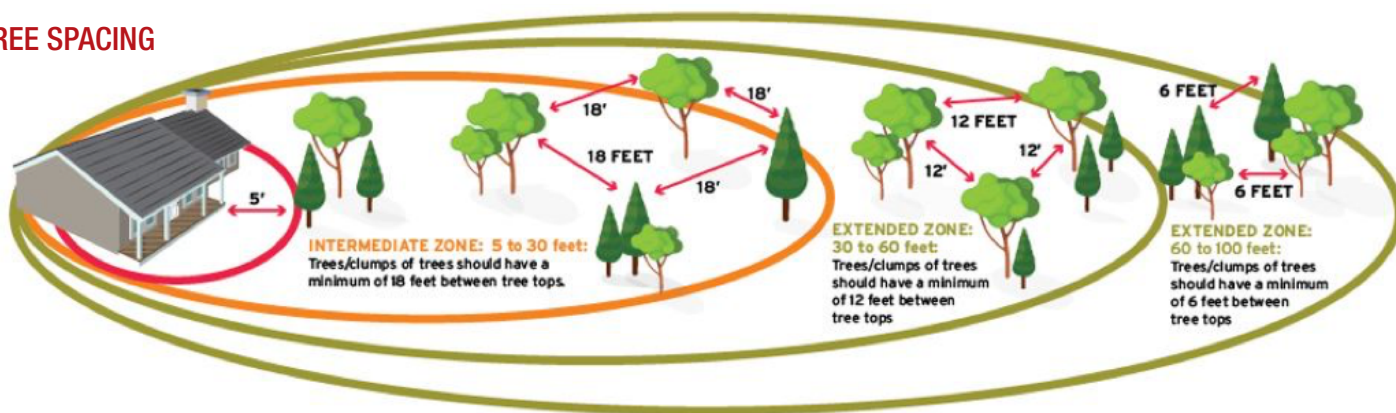

EXTENDED ZONE

30-100 feet, out to 200 feet. Landscaping—the goal here is not to eliminate fire but to interrupt fire's path and keep flames smaller and on the ground.

- Dispose of heavy accumulations of ground litter/debris.
- Remove dead plant and tree material.
- Remove small conifers growing between mature trees.
- Remove vegetation adjacent to storage sheds or other outbuildings within this area.
- Trees 30 to 60 feet from the home should have at least 12 feet between canopy tops.*
- Trees 60 to 100 feet from the home should have at least 6 feet between the canopy tops.*

**The distances listed for crown spacing are suggested based on NFPA 1144. However, the crown spacing needed to reduce/prevent crown fire potential could be significantly greater due to slope, the species of trees involved and other site specific conditions. Check with your local forestry professional to get advice on what is appropriate for your property.*



FIREWISE USA™
Residents reducing wildfire risks